


TRUNCATED DOME PATTERN

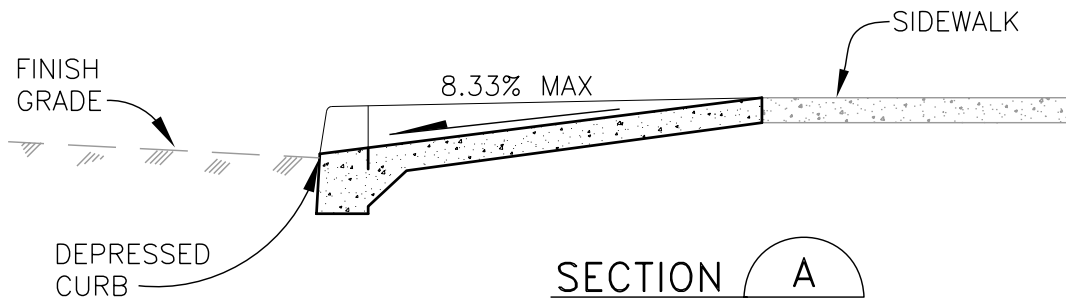

NOTES:

1. TRUNCATED DOME PATTERN SHALL BE 2' DEEP, WIDTH VARIES (4' MINIMUM).
2. REFERENCE TECHNICAL SPEC. SECTION 4150.
3. TRUNCATED DOME TO BE SAFETY YELLOW OR APPROVED OTHERWISE.
4. COMPLY WITH CURRENT ADA STANDARDS.
5. MATERIAL - 3500 PSI CONCRETE AT 28 DAYS.

WOODBURN
 O R E G O N
 Incorporated 1889
 PUBLIC WORKS DEPARTMENT
 ENGINEERING DIVISION

**ADA RAMP
 AT PROPERTY
 LINE SIDEWALK**

REV: DEC. 2007

SCALE: NTS

DET No.

4150-6