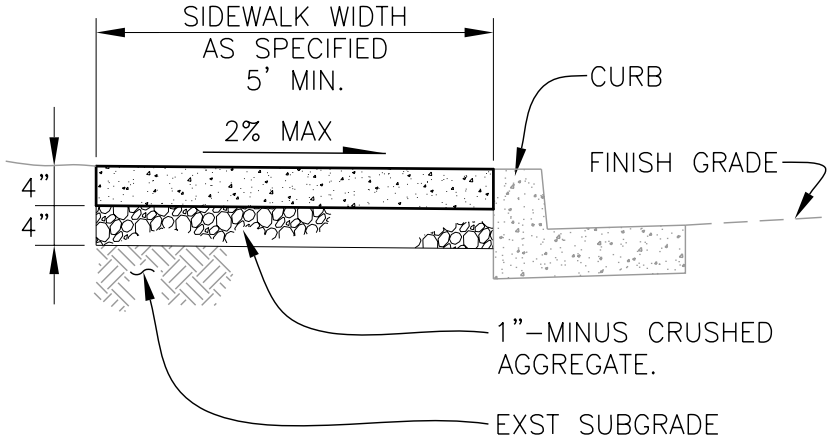

CURBLINE SIDEWALK

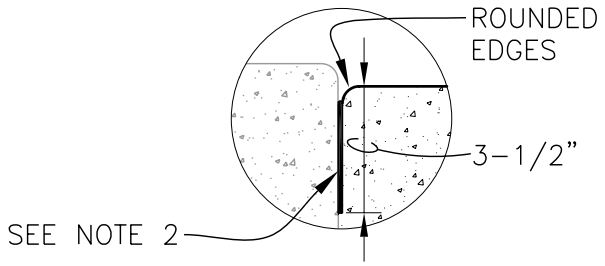

EXPANSION JOINT

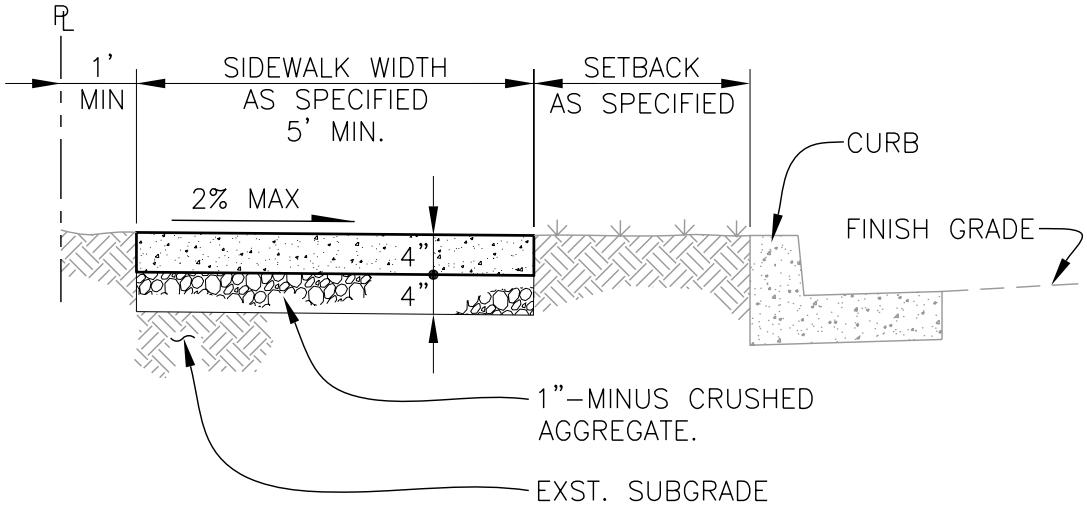

PROPERTY LINE SIDEWALK

NOTES:

1. MATERIAL – 3500 PSI CONCRETE AT 28 DAYS. BROOM FINISH SURFACE & PROVIDE 3" EDGE SHINE. REFERENCE TECHNICAL SPEC. SECTION 4150.

2. EXPANSION JOINTS (EJ) SHALL BE 1/2" AC IMPREGNATED JOINT FILLER AT ALL DISSIMILAR VERTICAL SURFACES.

3. TRANSVERSE CONSTRUCTION JOINTS (CJ) 1-1/2" DEEP OR 1/3 OF THE THICKNESS (T) @ 5' INTERVALS.

4. FOR SIDEWALK AT DRIVEWAYS SEE DETAILS 4150-3 AND 4150-4.

WOODBURN
OREGON
Incorporated 1889
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

SIDEWALKS

REV: DEC. 2007
SCALE: NTS
DET No.
4150-8